



Comprehensive DSP Tool Solutions

Sales: (281) 494-4500 x 113


XDS100V2 USB JTAG Emulator



Documentation
 Installation Guide
[Support](#)

Application
 Software Debug

Warranty: 30 days

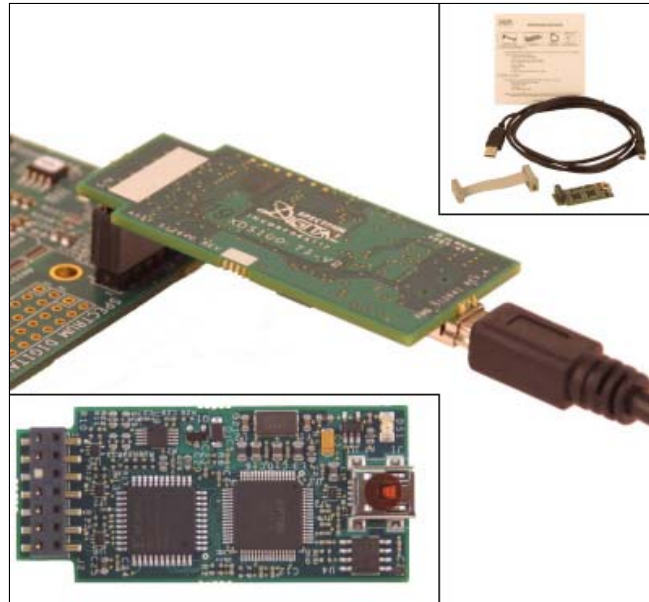

Part #: 702302

XDS100V2 USB JTAG Emulator

Hardware Features

- Supports Texas Instruments Processors and Microcontrollers with JTAG interface:
 - F28xx
 - C54xx
 - C674x
 - C55xx
 - C64x+
 - Cortex™
 - ARM9
- USB Bus Powered
- Supports USB 2.0 (480mbps)
- Compatible with +1.8V or +3.3V JTAG Interfaces.
- Supports targets with 14-pin JTAG Header.
- Dimensions: 2.22"L x 1."W Low Profile
- 14-pin JTAG Header

Software Features

- Compatible with Code Composer Studio IDE™ from Texas Instruments version v4
- Supports Code Composer Studio™ C2000 On-Chip Flash Programmer.
- Compatible with Windows 2000, XP, and Vista.

Additional Details

- Current XDS100 product details may be found at: [XDS100 Wiki](#)

What's Included

- XDS100V2 USB JTAG Emulator
- USB cable
- 14-pin JTAG extender cable
- Quick Start Guide

You May Need

- Code Composer Studio™
- 14 pin to 20 pin CTI JTAG adapter, part# 701212

© 2002-2009 Spectrum Digital, Inc. All Rights Reserved.



Kane Computing Ltd
 7 Theatre Court, London Road,
 Northwich, Cheshire, CW9 5HB, UK.
 Tel: +44(0)1606 351006
 Fax: +44(0)1606 351007/8
 Email: sales@kanecomputing.com
 Web: www.kanecomputing.co.uk